
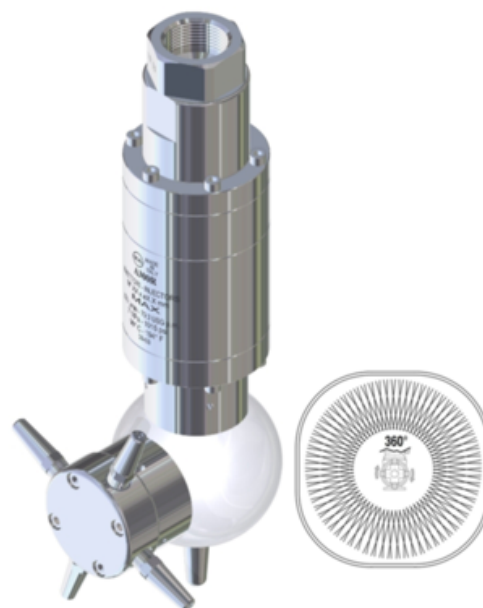


A300R - Self-propelled Tank Cleaner



| Part No. | Rated Flow | Nozzle type | Min.overall Ø | Weight |
|----------------------------|-------------------------|-------------|------------------|---------------------|
| 25.6000.10 | 100 l/min - 26.45 USGpm | 4 × 1/4 Npt | 183 mm - 7.19 in | 10200 gr. - 360 oz. |
| 25.6000.15 | 130 l/min - 34.36 USGpm | 4 × 1/4 Npt | 183 mm - 7.19 in | 10200 gr. - 360 oz. |
| 25.6000.17 | 150 l/min - 38.86 USGpm | 4 × 1/4 Npt | 183 mm - 7.19 in | 10200 gr. - 360 oz. |
| 25.6000.20 | 180 l/min - 46.63 USGpm | 4 × 1/4 Npt | 183 mm - 7.19 in | 10200 gr. - 360 oz. |
| 25.6000.24 | 220 l/min - 57 USGpm | 4 × 1/4 Npt | 183 mm - 7.19 in | 10200 gr. - 360 oz. |
| 25.6000.30 | 300 l/min - 79.3 USGpm | 4 × 1/4 Npt | 183 mm - 7.19 in | 10200 gr. - 360 oz. |

Common Features

| | |
|--------------------------------|---------------------------|
| Inlet | 1" 1/4 Bsp F |
| Rated Pressure | 70 bar - 7 MPa - 1015 psi |
| Min. operating pressure | 30 bar - 3 MPa - 435 psi |
| Rated Flow Rate | 300 l/min - 79.3 USGpm |
| Rated Temperature | 90 °C - 195 °F |
| Material | Stainless steel 303 |
| Rated rotation speed | 5 giri/min - 0 RPM |
| Max. Rpm | 6 giri/min - 0 RPM |